


Smooth Gravity Drain Scrap Bins

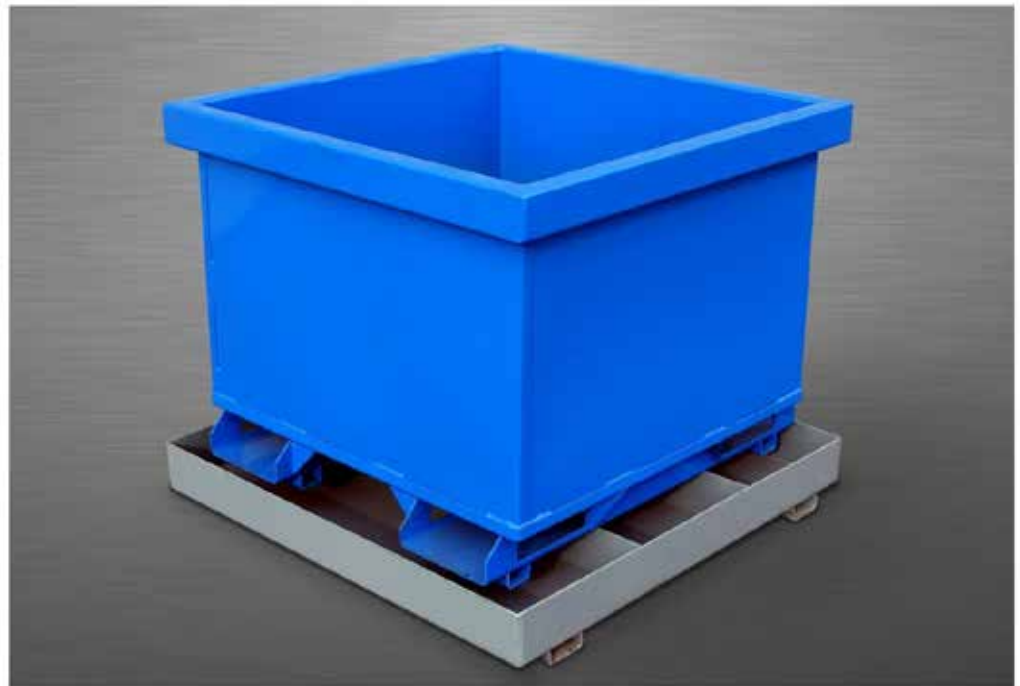


QUALITY, DURABILITY, VALUE

Standard Specifications

- 12 GA construction with Pan Formed Bottom.
- Sub-floor for draining liquid with 8" perforated center floor sheet by depth of bin.
- 12 GA interlocking banding.
- 7 GA 3" x 8" notched channels (available length-wise or width-wise and with 4 way entry 2 1/2" x 7" cut-outs).
- Stackable - stacking clips for added stability.
- Full inseam welds (watertight).
- 1 1/2" Metal drain plug.
- Some sizes available with steel or plastic lids.
- 1-Piece steel flip lids available on our standard sizes.
- Interior and exterior coated with rust inhibitive alkyd primer.
- Exterior (including bottom) painted your choice of standard color with alkyd enamel paint. Some colors may be extra.
- Shown in photos with an optional secondary containment pallet.

Smooth Gravity Drain Scrap Bins

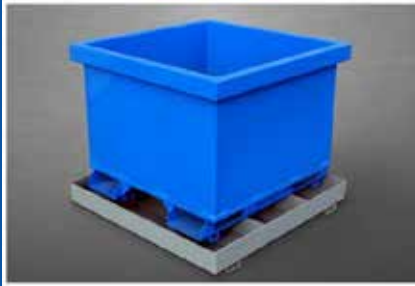

Dimensions and Drawing

PRODUCT #	A (less 3½" for ID)	B (less 3½" for ID)	C (add 4½" for OD)
13648-9	36"	36"	24"
11913-9	36"	36"	36"
12002-9	48"	42"	48"
12104-9	72"	48"	48"
12200-9	84"	48"	48"

